





INFINITE

SYSTEMS

ND 216 HP V4

A 3-Way Full Range High Efficiency Speaker System, Slim Compact Trapezoidal MDF reduced resonance enclosure, loaded with dual 6.5" Ultra High Efficiency Neodymium Low/Low Mid Frequency Transducers and a 1" Neodymium High Frequency Compression driver with a 1.75" Voice Coil, mounted on a 90° x 60° constant directivity, injected rotatable horn. Grille material shall be a robust 16-gauge 316L Stainless Steel, Neutrik Connector. Standard finish color is textured black and is also available in any custom color, 5-year Limited Commercial Warranty.

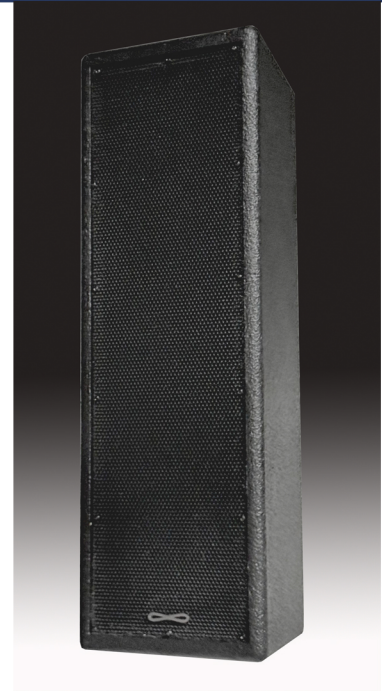

TECHNICAL DATA

Utility Configuration

Full-Range 3 Way Speaker System Vented Dual 6.5" Neodymium Low and Low Mid Cone Transducers with 1.00" Exit High Frequency Neodymium Compression Driver with 1.75" Voice Coil

Nominal Impedance
Rated Power RMS
Sensitivity 1W/1M
Applied Range
Rotatable Coverage
Connectors
Net Weight
Finish Color
Grille/Protection
Warranty
Dimensions

4 ohms
600W
98 db
70Hz to 20kHz
90° x 60°
NL-4
40 lbs
Black or Custom
316L Stainless
60 Month Limited Commercial
9" W X 9 3/4"D X 28"H inches

WP WEATHER PROTECTED VERSION

- Constructed of Treated Exterior Composite wood panel, which is vermin, termite and mold resistant, without sounding like plastic or fiberglass.
- 316L Stainless Steel Grille for maximum corrosion resistance in the harshest environments.
- 1/4" acoustically transparent foam water stop layer.
- 100 micron 316L Stainless Steel Mesh for insect resistance in outdoor use within landscape environments.
- Weatherized component treatment for long term reliability.
- Watertight junction box for secure connections and vandal resistance on larger properties.
- All Stainless Steel Hardware for reliable, long term outdoor installation.